

# truecraft® wheel changer

For effortless, fast and safe removal and fitting of all agricultural, industrial and commercial wheels. Capable of lifting all types of wheels.

Takes the effort out of changing and handling heavy rear wheels!

## 1.5 Tonne Hydraulic Wheel Changer

- Hydraulic ram for quick, accurate adjustment
- Allows free access to the wheel studs at all times
- 2 roller tables each with 4 rollers to enable easy rotation of wheel for alignment to studs

Lifting capacity . . . . . 1500 kg.  
Maximum wheel dia . . . 2200mm.  
Minimum wheel dia . . . 1000mm.  
Maximum wheel width . 800mm.  
Dimensions . . . . . W1300 x D1015 x H1500mm.  
Weight . . . . . 118 kg.

**18173** Professional hydraulic wheel changer.



**Adjustable retaining arm**  
secures wheel on roller tables  
Retaining arm can be used right or left handed, to allow better access in restricted areas

**FEATURES for safe working**

**Adjustable angle of retaining arm** – Allows free access to the wheel studs at all times



**Dual uprights** – Each with a handle to assist manoeuvrability

**4 heavy duty 6" diameter casters** (2 with brakes) to enable ease of movement once the wheel is on the roller tables

**2 roller tables** each with 4 rollers to enable easy rotation of wheel alignment to studs



### What our customers say..

*"The hydraulic wheel changer has made changing wheels a much safer and quicker operation. Trying to spin a big tyre on a concrete floor is both difficult and dangerous – but the wheel changer does it all for you. It is a simple and strong bit of kit that saves a lot of backache and sweat."*

Mr Egarr – Agricultural engineer, 3,000 acre farming estate in the UK.

CALL PALMER AGRI PARTS: 03 308 6509

## truecraft® dual bead breaker

Hydraulically operated to quickly and efficiently break tyre beads without the need to remove the wheel from the vehicle

### Hydraulic Dual Bead Breaker

Uniquely designed to break the outer and inner tyre bead in two easy steps.


- Suitable for tyres from 240 to 800mm wide
- Heavy duty construction incorporating 10 ton hydraulic ram
- Easy to operate – saves time and effort

17730 Hydraulic dual bead breaker.

saves  
time and  
effort!



SIMPLE  
OPERATION!

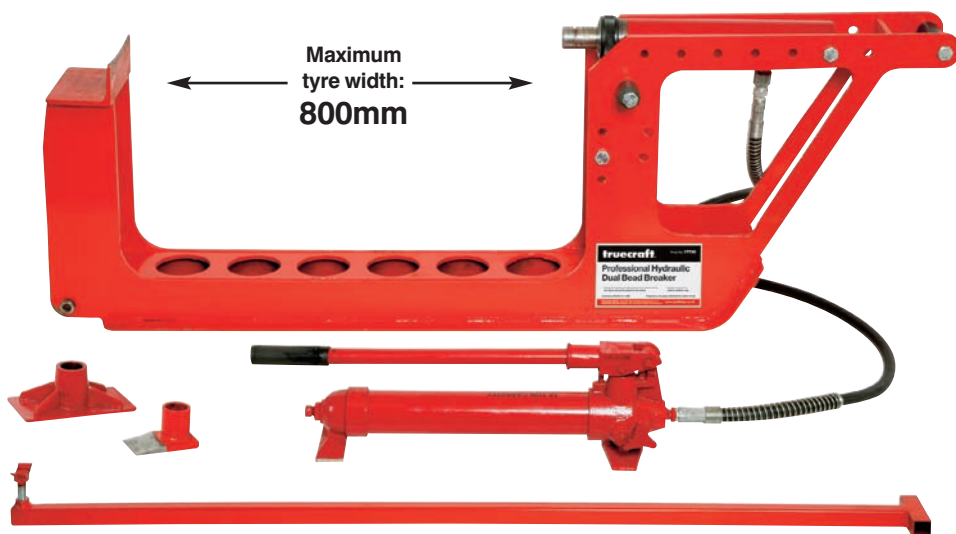

Maximum  
tyre width:  
800mm

Simple steps to breaking  
inner and outer beads



Breaking the inner bead



Breaking the outer bead

Protected by UK patents GB2400587A & GB2417013A.

**Palmer**  
Agri Parts Direct Ltd

Free Phone: 0800 4 PALMERS  
Fax: 03 308 6512  
E-mail: palmeragriparts@xtra.co.nz  
Post: 34 Robinson St, Riverside Industrial Estate  
Ashburton, South Island NZ

Spaldings reserve the right to change specifications without prior notice.